

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T3S R9W

1/4

SEC 35 | SEC 36

U.S.B.&M.


C-21



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 48°21'07" W	13.39'
L2	N 33°01'48" E	18.97'
L3	S 52°51'02" W	10.21'

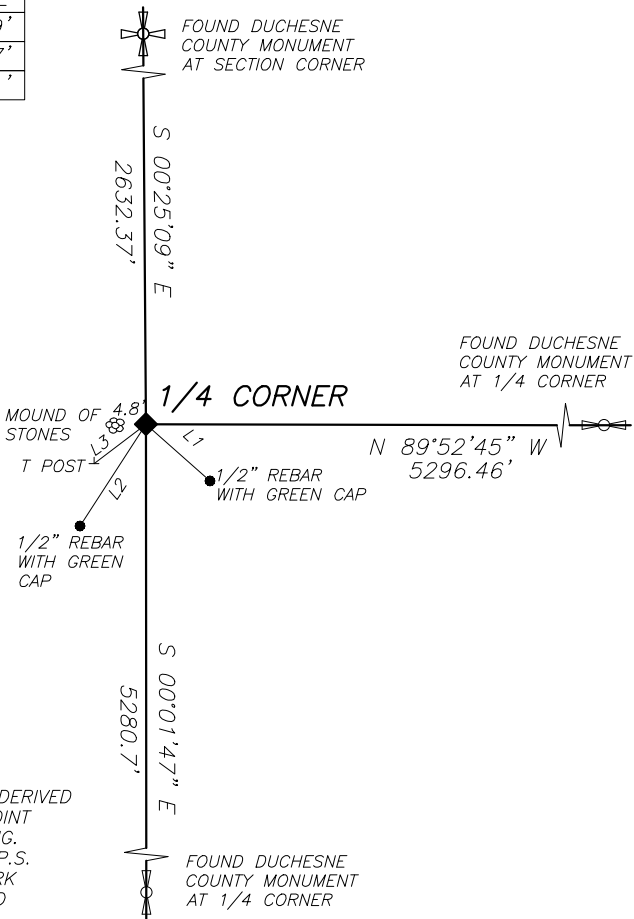

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT. 40°11'44.89846"N AND LONG. 110°49'41.53893"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH YELLOW CAP MARKED "148951" WITH ORIGINAL MARKED STONE ALONGSIDE AT POSITION OF 1/4 CORNER



PHOTO OF MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET TWO 1/2" REBAR WITH GREEN CAPS MARKED "REFERENCE MARKER" AND REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7233549.667
E: 1819602.488
NAVD88 EL: 7040.33'

LATITUDE: 40°10'34.33252" N
LONGITUDE: 110°51'31.36548" W
ELLIPSOID HEIGHT: 6985.25'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300030S0090W0_600140



PHOTO OF MONUMENT FACING SOUTHWEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 22 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

